

# DURANGO



# DURANGO CONSTRUCTION



## TOWING HITCH

2" Towing Receiver w/ 4 Pin Wire Harness Connection (3,000 lb. Tow Rating & 300 lb. Hitch Rating)



**CURT**  
ROTA-FLEX PIN BOX



- > 16" Uniroyal E-Range Radial Tires with 8 Lug Aluminum Wheels
- > MORryde 4-Step StepAbove RV Entry Steps
- > MORryde SafeT Handrail
- > RoadTech TPMS with Banded Sensors on the rim and Monitor Screen



FULLY VENTED ATTIC SYSTEM w/ 2 ATTIC VENTS



DICOR TUFFLEX PVC ROOF MEMBRANE W/ LIFETIME WARRANTY & WALKABLE ROOF



16" Uniroyal E-Rated Tires w/ 8-Lug Heavy-Duty Aluminum Rims



CURT Touring Coil Spring Suspension with 8 Shocks and Anti-Lock Brakes.



Reduces road shock into the frame by **50%**



- > (2) 200W Panels
- > 30A MPPT Solar Charge Controller with MPPT Remote Panel
- > 2,000W Pure Sine Wave Inverter making all electrical outlets "Live"

BOONDOCKER SOLAR PACKAGE (OPTIONAL)



**60K**  
ON-DEMAND TANKLESS WATER HEATER



**ALL WEATHER INSULATION PACKAGE**  
Feel the Difference.


- THERMAL ROOF** R-38\*  
Layer of fiberglass insulation, layer of radiant foil, and Dicor PVC membrane. All layers extend the full length of the roof. Vented attic allows condensation to escape.
- FULLY LAMINATED SIDEWALLS** R-13\*  
Sidewalls, rear wall, slideroom end walls, and slideroom roof are all welded aluminum framed and laminated with foam insulation.
- INSULATED MAIN FLOOR** R-38\*  
5/8" Tongue & Groove plywood floor, lined with fiberglass insulation layer and a layer of radiant foil insulation.
- INSULATED FRONT WALLS** R-38\*  
Welded aluminum framed and laminated with fiberglass insulation and a layer of radiant foil.

\*CALCULATED R VALUE



## STRENGTH OF FRAME - CHASSIS

Steel Powder Coated Space Saver Drop Frame 2" Torsion Tube Welded



- ENCLOSED UNDERBELLY**  
Woven poly stranded material barrier is wrapped around the edges and securely stapled to the framing, adding an extra layer of moisture protection.

- INSULATED HEAVY DUTY BAGGAGE DOORS**  
Insulated with foam.

## COMFORT

35,000 BTU FURNACE

2 - 15K DUCTED A/C

40" FIREPLACE


HEATED UNDERBELLY  
Dedicated heat ducts in the underbelly and storage bay.



RACETRACK DUCTING with RV AIRFLOW  
Uninterrupted airflow from front to back



**40%**  
More Efficient and Quieter A/C System

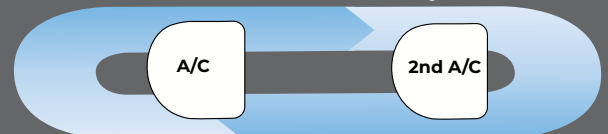

## KEY FEATURES



STARLINK PREP from WINEGARD



SQUARE FRAMELESS WINDOWS



ALL PEX PLUMBING & SHUT-OFF VALVES



DOVETAIL DRAWER BOXES



WATER FILTRATION SYSTEM



SINGLE DRAWER DISHWASHER




D301RLT Shown in Pebble Décor



D301RLT Shown in Pebble Décor


### D301RLT

UVW: 11,280 | Exterior Length: 34' 3" | Sleeps: 4

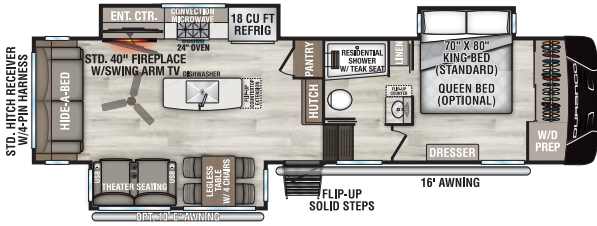


### D302RLT

UVW: 11,700 | Exterior Length: 35' 2" | Sleeps: 4

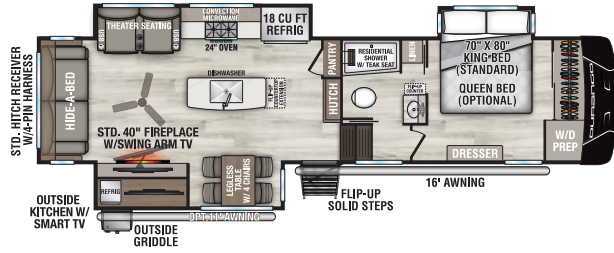


### D304MKT - NEW

UVW: TBD | Exterior Length: 34' 3" | Sleeps: 4

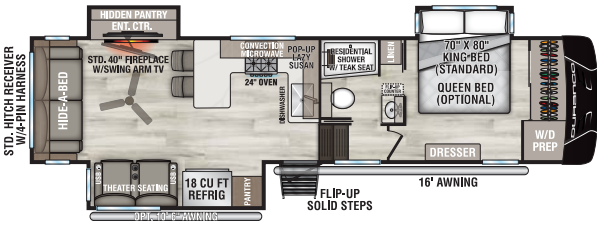


### D321RKT

UVW: 11,200 | Exterior Length: 34' 10" | Sleeps: 4

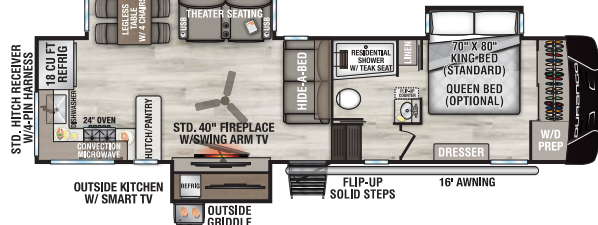


### D326RLT

UVW: 11,500 | Exterior Length: 37' 7" | Sleeps: 6

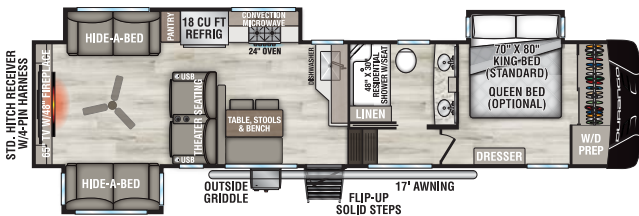


### D339MLT

UVW: 11,770 | Exterior Length: 37' 6" | Sleeps: 4

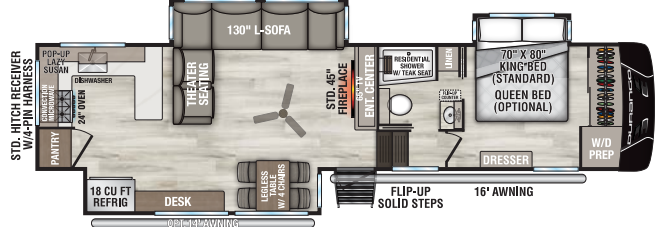


### D348BHF

UVW: 14,200 | Exterior Length: 42' 2" | Sleeps: 11

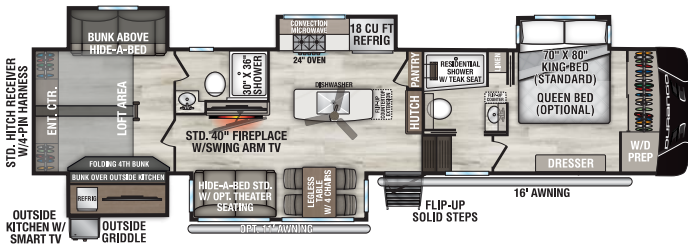

### D349TBQ - NEW

UVW: 13,380 | Exterior Length: 43' | Sleeps: 8

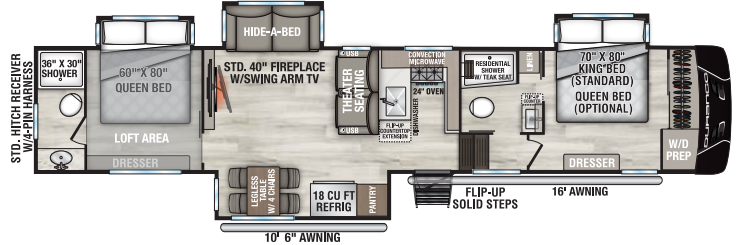

D301RLT Shown in Pebble Décor



D301RLT Shown in Pebble Décor

# DURANGO SPECIFICATIONS

|                                        | D301RLT         | D302RLT      | D304MKT         | D321RKT | D326RLT | D339MLT      | D348BHF      | D349TBQ    |
|----------------------------------------|-----------------|--------------|-----------------|---------|---------|--------------|--------------|------------|
| UVW (Unloaded Vehicle Weight)*         | 11,280          | 11,700       | TBD             | 11,200  | 11,500  | 11,770       | 14,200       | 13,380     |
| Dry Hitch Weight*                      | 2,280           | 2,150        | TBD             | 2,340   | 2,100   | 2,190        | 2,580        | 2,720      |
| Dry Axle Weight*                       | 9,000           | 9,550        | TBD             | 8,860   | 9,400   | 9,580        | 11,620       | 10,660     |
| CCC (Cargo Carrying Capacity)          | 1,715           | 1,800        | TBD             | 1,795   | 2,000   | 2,025        | 1,795        | 2,615      |
| GVWR                                   | 12,995          | 13,500       | 13,500          | 12,995  | 13,500  | 13,795       | 15,995       | 15,995     |
| Exterior Height (with A/C)             | 13' 4"          | 13' 4"       | 13' 4"          | 13' 4"  | 13' 4"  | 13' 4"       | 13' 4"       | 13' 4"     |
| Exterior Width                         | 96"             | 96"          | 96"             | 96"     | 96"     | 96"          | 96"          | 96"        |
| Exterior Length**                      | 34' 3"          | 35' 2"       | 34' 3"          | 34' 10" | 37' 7"  | 37' 6"       | 42' 2"       | 43'        |
| Refrigerator (Cubic Feet)              | 18              | 18           | 18              | 18      | 18      | 18           | 18           | 18         |
| Water Heater Cap. (On-Demand Tankless) | ***             | ***          | ***             | ***     | ***     | ***          | ***          | ***        |
| Fresh Water Cap. (Gal.)                | 76              | 76           | 76              | 76      | 76      | 76           | 76           | 76         |
| Waste Water Cap. (Gal.)                | 50              | 50           | 50              | 50      | 50      | 50           | 50           | 50         |
| Gray Water Cap. (Gal.)                 | 90              | 90           | 90              | 90      | 90      | 90           | 50           | 50         |
| 1/2 Bath Cap. (Gal.)                   | N/A             | N/A          | N/A             | N/A     | N/A     | N/A          | 50           | 50         |
| LP Gas Cap. (Lbs.)                     | 60              | 60           | 60              | 60      | 60      | 60           | 60           | 60         |
| Furnace BTUs (1,000s)                  | 35              | 35           | 35              | 35      | 35      | 35           | 35           | 35         |
| Axle Size w/CURT Susp.                 | 6,000           | 6,000        | 6,000           | 6,000   | 6,000   | 6,000        | 7,000        | 7,000      |
| Tire Size                              | 16"             | 16"          | 16"             | 16"     | 16"     | 16"          | 17.5"        | 17.5"      |
| Awning                                 | 16'/10' 6" opt. | 16'/11' opt. | 16'/10' 6" opt. | 16'     | 17'     | 16'/14' opt. | 16'/11' opt. | 16'/10' 6" |

\* This weight reflects the rolling average unit weight for each model. Your trailer weight will vary according to optional equipment.

\*\* Exterior length is measured from rear of bumper to leading edge of coupler.

\*\*\* Infinite supply.



*Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error on this website. Some items shown are not included as standard or optional equipment.*

Dealer:



985 N 900 W • Shipshewana, IN 46565

E-mail [kz@kz-rv.com](mailto:kz@kz-rv.com) • [www.kz-rv.com](http://www.kz-rv.com)

©2026 | 07/31/2026